




WARNING:

READ CAREFULLY BEFORE INSTALLING LED LIGHT. KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE. CRITICAL SAFETY INSTRUCTIONS:


- Installation should only be conducted by a qualified electrician in accordance with NEC and any relevant local building codes.
- Risk of fire or electric shock. LED Light installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- Be certain electrical power is OFF before and during installation and maintenance. LED Lights must be connected to a wiring system with an equipment-grounding conductor.
- Make sure the supply voltage is the same as the rated LED Lights voltage. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.
- Maximum number/power of fittings for loop in/out power option: 25 units/400W (2ft), 10 units/500W (4ft), or 5 units/600W (8ft).
- This LED light is intended to be connected to a properly installed and grounded UL listed junction box with suitable strain relief means for power cord. The junction box is not included, can be purchased separately.

Included Parts


NO	QTY	2FT/4FT	8FT
A	1 PC	- Vapor Tight LED Fixture	
B	8 PCS	- Mounting Clips (2FT)	
	12 PCS	- Mounting Clips (4FT)	22 PCS - Mounting Clips (8FT)
C	4 PCS	- Drywall Anchors	8 PCS - Drywall Anchors (8FT)
D	4 PCS	- M4x 30 anchor screws	8 PCS - M4x 30 anchor screws (8FT)
E	4 PCS	- M4 Flat washers	8 PCS - M4 Flat washers (8FT)
F	2 PCS	- Liquid Tight Cord Grip (one loose and one preinstalled in fixture)	
G	2 PCS	- Mounting Brackets	4 PCS - Mounting Brackets (8FT)

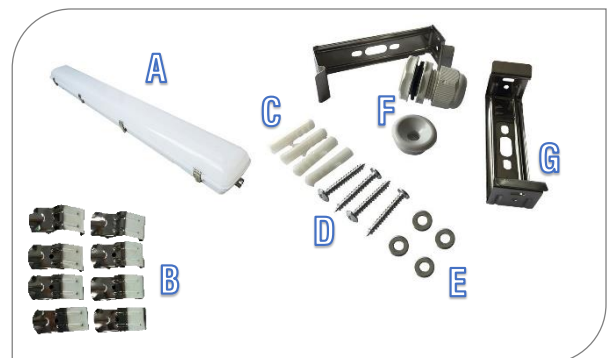

Dimension Diagram

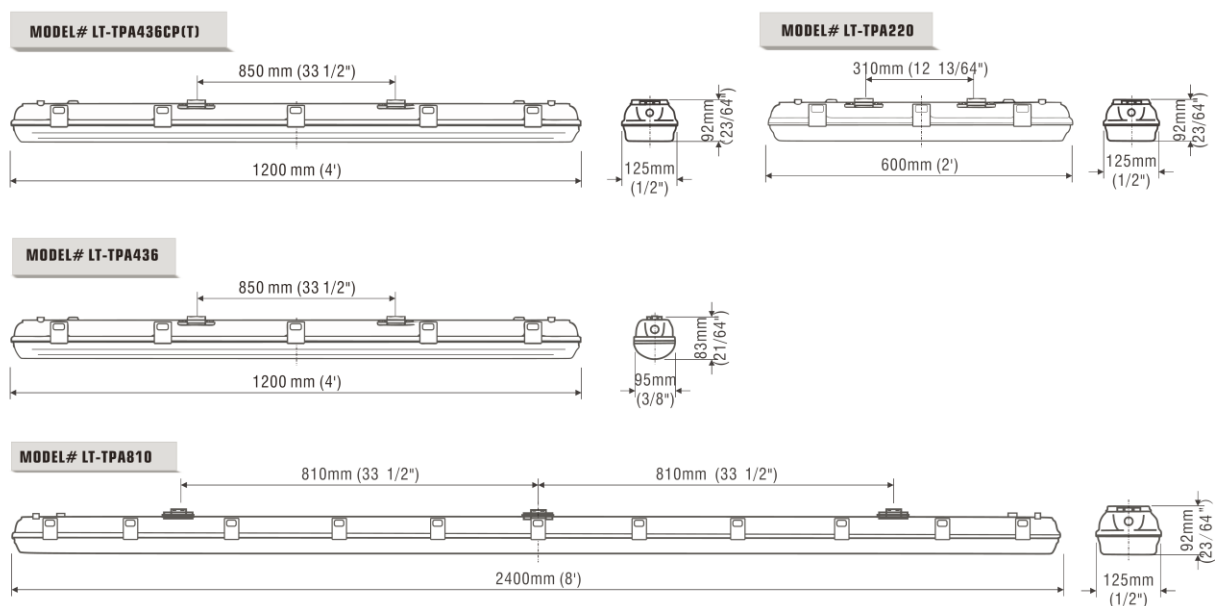


Installation Diagram

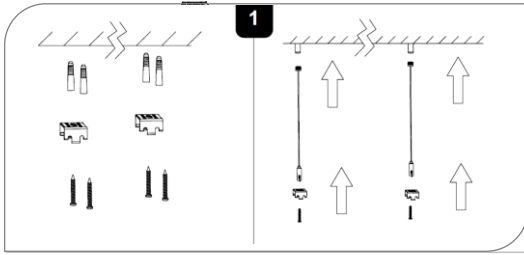


1. Check installation location and confirm if there any passing wiring/piping prior drilling and installing cables. Fix the mounting brackets / suspension kits on the ceiling at correct spacing as per dimensions.


(Note: Left is surface mount. Right is suspending mount instruction)

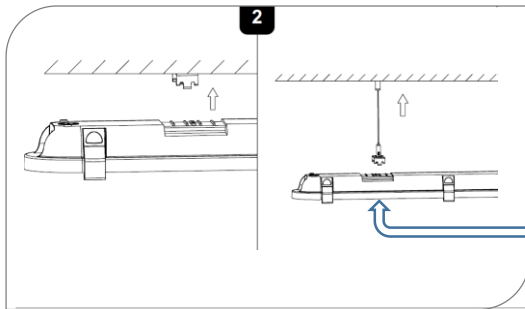

2. Select the CCT or Power as per your request. (CCT & Power Selectable type)
Place and fix base of fixture using the pre-fixed mounting brackets / suspension kits.

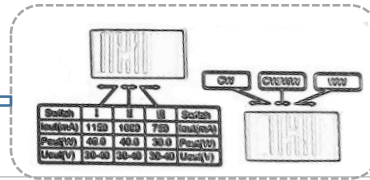


CCT & Power Selectable Slide Switch

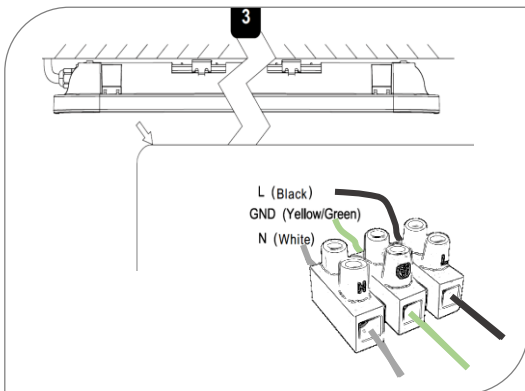



3. Connect the power cables accordingly on the terminal block.

Make sure L2 Black line **NOT** control by the switch. (Emergency Mode)


Wire Diagram



Emergency Wire Diagram

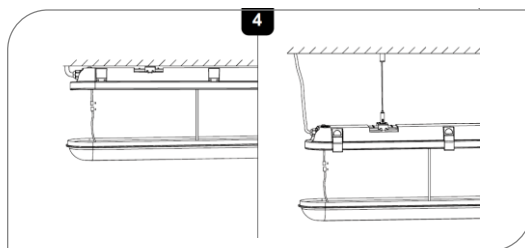

4. Check if all connections are correct and properly insulated. Fit the tray back in the casing.

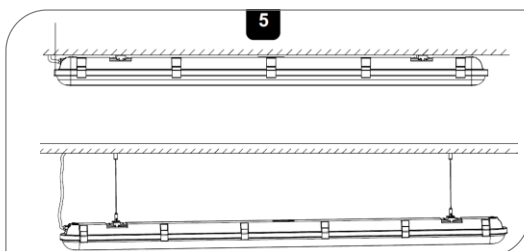

5. Install the diffuser or cover to the base of fixture and fix with the clips.