

CONSTRUCTION & MATERIALS

- High duty die-casting aluminum alloy heat sink housing
- Impact-proof 5mm thickness glass refractor, never aging yellowish by the time.
- IP 65 rating for outdoor usage
- Polyester powder-coated finish, rust and corrosion proof

MOUNTING AND WIRING

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

ENVIRONMENTAL SYSTEM

- Indoor or outdoor wet/damp location

FINISH

- Bronze

ELECTRICAL SYSTEM

- Input voltage 100-277VAC or 250-480VAC,
- ETL/cETL, CE/RoHs, DLC qualified

OPTICAL SYSTEM

- 140 lm/w
- Color temperature: 3000K, 4000K, 5000K, 5700K
- DLC listed as Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires

LIGHTING CONTROL

- Standard 1-10vdc dimming
- Occupancy sensor available
- Emergency Backup available

WARRANTY

5 Years

LT-WP01 SERIES LED WALL PACK LIGHT

LED Wall Pack Light provides high duty die-casting aluminum alloy heat sink. Tempered glass refractor never does become yellowish by the time. Powder-coating finished housing and sealed gasket especially are suitable for outdoor corrosion and wet/damp location. Occupancy sensor can be optional application for building, parking lot lighting, square, road and others. Many utilities offer lucrative rebates for LMC' lights LED. It is able to accelerate the payback.

Performance

Light Output Efficacy: 140 lumens/watt
Input Power: 40/60/90/120 watts
CRI: 70
CCT: 3000K, 4000K, 5000K, 5700K
Finish: Bronze
Input Voltage: 100-277vac or 250-480vac
Warranty: 5 years
Mounting: Surface mount
Weight: 6.5 Kg max.
Dimming: Std. 0-10V
Certificate : ETL/cETL listed, CE & RoHs
 DLC qualification

Cover Option




Glass Refractor




PC Refractor

Dimension

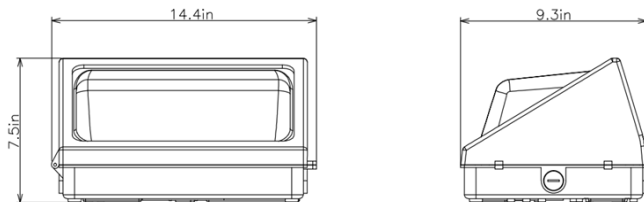

Accessory



Grid Shield



Light Shield



Photocell



Emergency Backup

Order Information

Sample Number: LT-WP01-90W-HV-30K-MS

Com.	Family Name	Wattage	Voltage	CCT	Refractor	Accessories
LT	WP01	40W	Blank=100-277VAC	30K=3000K	Blank=Glass	PC=Photocell
Lightide	Wall Pack #01 series	60W	HV=250-480VAC	40K=4000K	P=PC	MS= Motion sensor
		90W		50K=5000K		GS= Grid Shield
		120W		57K=5700K		LS= Light Shield
						EM= Emergency Backup

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: sales@lightideled.com
<https://www.lightideled.com>
 Lightide Manufactory Co., Ltd | Lightide HK Industrial Co., Limited
 All right reserved.

