Full Cutoff

LED WallPack

Emergency Backup

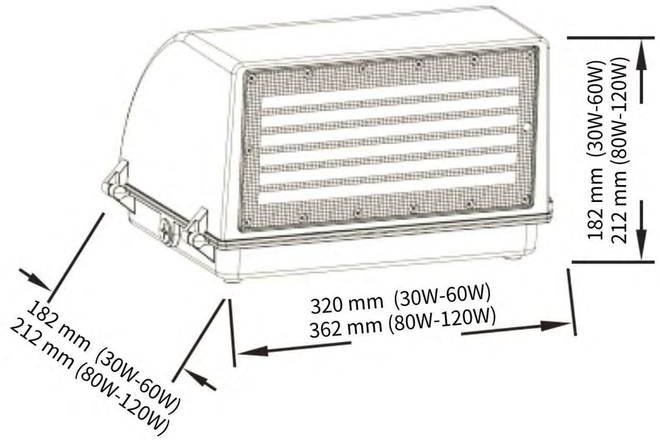

Product Introduction

Light Efficacy: 120 lumens/watt
Dimming: 1-10vdc available
CCT: 3000K, 4000K, 5000K, 5700K
Finish: Bronze
CRI: >70
Input Voltage:100-277vac or 200-480Vac
Beam Angle: 120 deg.
Occupancy sensor available
Emergency Backup available
Certificate: ETL/cETL listed, CE

Features

- Commercial grade
- High-duty die-casting aluminum alloy housing
- Mount directly over a standard outlet box or surface wiring via any of the 3 convenient ¾ inch threaded conduit entry hubs.
- IP 65 rating for Indoor or outdoor wet/damp location
- Impact-proof PC diffuser
- Full Cutoff style Wall-Mounted Area Luminaires
- Emergency Backup 90~180 min available.
- Occupancy sensor available
- 5 years warranty

Specfication

Model#	Input Voltage	Power	Light Efficacy	Beam Angle	CRI	Equv.
LT-WPCA-30W	100-277VAC	30W	120 LPW	120	>70	75-100W MH
LT-WPCA-60W	100-277VAC	60W	120 LPW	120	>70	175-250W MH
LT-WPCA-80W	100-277VAC	80W	120 LPW	120	>70	250-400W MH
LT-WPCA-100W	100-277VAC	100W	120 LPW	120	>70	400W MH
LT-WPCA-120W	100-277VAC	120W	120 LPW	120	>70	400-600W MH

Order Information

For example: LT-WPCA-60W-HV-30K-PC-EM

Company	Product Info.	Code	Power	Input Voltage	CCT	Control
LT	WPC	A	35W	Std.=100-277VAC	27K=2700K	DM=1-10DC Dim
			60W	HV=200-480VAC	30K=3000K	PC=Photocell
			80W	EV=200-240VAC	40K=4000K	MS=Motion Sensor
			100W		50K=5000K	EM=Emergency Kit
			120W		57K=5700K	