

<b>Catalog</b>	
<b>Type</b>	<b>Wall Mount</b>
<b>Note</b>	<b>Ver A 2019-01</b>

## MINI LED WALL PACK (WP02A Series)

### DESCRIPTION

MINI LED Wall Pack Light provides small profile dia-casting aluminum alloy heat sink and shatter-proof PC diffuser. Powder-coating finished housing and sealed gasket especially are suitable for outdoor corrosion and wet/ damp location. Photocell sensor can be optional application for entrance, building, parking lot lighting, square, road and others.

### CONSTRUCTION & MATERIALS

- Dia-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- Impact-proof and shatter-proof polycarbonate diffuser
- IP 65 rating waterproof protection
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- Internal UL approved power supply

### MOUNTING AND WIRING

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

### ENVIRONMENTAL SYSTEM

- Outdoor wet/damp location

### FINISH

- Black (white option)

### ELECTRICAL SYSTEM

- Input voltage 100-277VAC, 50/60Hz
- ETL/cETL/CE/RoHs, DLC QPL

### OPTICAL SYSTEM

- LM 80 SMD LED
- Color temperature: 3000K, 4000K, 5000K, 6000K
- DLC listed as Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires

### LIGHTING CONTROL

- Photocell

### WARRANTY

5 Years

### ORDER INFORMATION

Sample Number: LT-WP02A-26W-27K-PC

Com.	Family Name	Wattage	CCT	Control Mode
LT	WP02A	12W	30K=3000K	PC=Photocell
	MINI Wall Pack Type	18W	40K=4000K	MS= Motion sensor
Lightide	02A series	26W	50K=5000K	
			60K=6000K	

### PACKAGE


Model#	QTY/ Carton	G. W.	Carton Size
LT-WP02A-12W	20 pieces	11.0 Kg	75X35X28 cm
LT-WP02A-18W/26W	10 pieces	12.5 Kg	64X39X31 cm




White Option



### DIMENSION

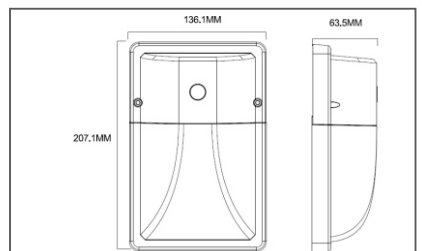

LT-WP02A-12W

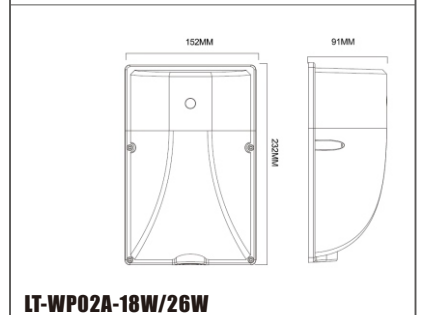

LT-WP02A-18W/26W





Catalog

Type

Wall Mount

Note

Ver A 2019-01

## MINI LED WALL PACK (WP02A Series)

### DATA SHEET

Model#	LT-WP02A-12W	LT-WP02A-18W	LT-WP02A-26W
LED Power	12W	18W	26W
Lumen Output	1400lm	2160 lm	3120 lm
Input Voltage	100-277VAC		
Power Factor	0.90		
Color Temperature	3000K/4000K/5000K/5700K		
CRI	>70		
L70	>50,000 hrs		
Operating Temp.	-30°C~+50°C		
Store Temp.	-40°C~+60°C		
Package	CTN: 64X39X32CM, 12.5Kg/CTN. 10PCS/CTN		
Installation	Recessed outlet box or wall surface		
Warranty	5 Years		
Environment	Suitable for damp/wet locations		
Certification	ETL/cETL/DLC		