

|                  |                      |
|------------------|----------------------|
| <b>Catalog #</b> |                      |
| <b>Type</b>      | <b>Wall Mount</b>    |
| <b>Note</b>      | <b>Ver A 2019-03</b> |

## Rotatable LED Wall Packs (WPSLA Series)

### DESCRIPTION

Rotatable LED Wall Packs provide die-casting aluminum alloy heat sink and tempered glass refractor. Adjustable direction can be available from 0-90 degree. Powder-coating finished housing and sealed gasket for Ip65 rating especially are suitable for outdoor corrosion and wet/ damp location. Motion sensor and photocell sensor can be optional application for building, parking lot lighting, square, road

### CONSTRUCTION & MATERIALS

- Die-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- Impact-proof and shatter-proof glass cover
- IP 65 rating waterproof protection
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- Internal UL approved power supply
- Adjustable project angle 0-90 degree from vertical to horizontal

### MOUNTING AND WIRING

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

### ENVIRONMENTAL SYSTEM

- Outdoor wet/damp location

### FINISH

- Bronze

### ELECTRICAL SYSTEM

- Input voltage 100-277VAC/347-480VAC, 50/60Hz
- ETL/cETL/CE/Rohs

### OPTICAL SYSTEM

- 120 lm/w output efficiency LM80 certified SMD LED
- Color temperature: 3000K, 4000K and 5000K. Other color temperature available for special order, consult factory for lead time.
- Outdoor Cutoff Wall-Mounted Area Luminaires


### LIGHTING CONTROL

- 0-10vdc/PWM dimming
- Motion sensor
- Photocell


### WARRANTY

5 Years


### ROTATABLE DIRECTION

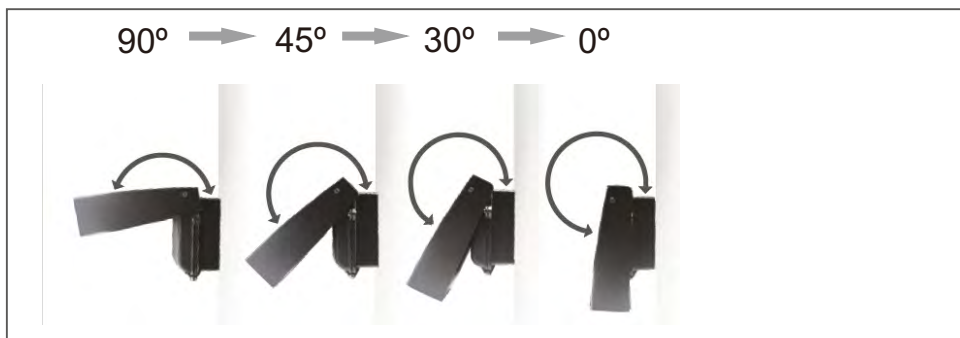

### DIMENSION

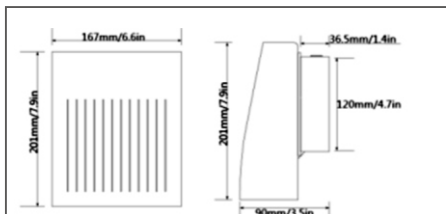

LT-WPSLA-25W/35W

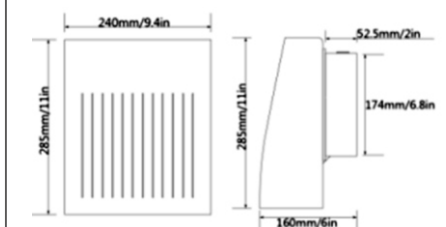

LT-WPSLA-70W/100W



|                  |                      |
|------------------|----------------------|
| <b>Catalog #</b> |                      |
| <b>Type</b>      | <b>Wall Mount</b>    |
| <b>Note</b>      | <b>Ver A 2019-03</b> |

## Rotatable LED Wall Packs (WPSLA Series)

### DATA SHEET

| Model#            | LT-WPSLA-25W                                      | LT-WPSLA-35W | LT-WPSLA-70W | LT-WPSLA-100W |
|-------------------|---|--------------|--------------|---------------|
| LED Power         | 25W   | 30W          | 70W          | 100W          |
| Lumen Output      | 2800 lm   | 3300 lm      | 8400 lm      | 11500 lm      |
| Size              | 7.9"x6.6"x3.5"                                    |              | 11"x9.4"x6"  |               |
| Input Voltage     | 100-277VAC  |              |              |               |
| Power Factor      | 0.90  |              |              |               |
| Color Temperature | 3000K/4000K/5000K/5700K                           |              |              |               |
| CRI               | >70   |              |              |               |
| L70               | >50,000 hrs                                       |              |              |               |
| Operating Temp.   | -30°C~+50°C                                       |              |              |               |
| Store Temp.       | -40°C~+60°C                                       |              |              |               |
| Material          | die-cast aluminum body(Bronze). Glass diffuse     |              |              |               |
| Installation      | Recessed outlet box or wall surface               |              |              |               |
| Warranty          | 5 Years   |              |              |               |
| Environment       | Suitable for damp/wet locations, IP 65 waterproof |              |              |               |
| Certification     | ETL/cETL, CE & RoHs                               |              |              |               |

### ORDER INFORMATION

Sample Number: LT-WPSLA-70W-HV-27K-BK-DM

| Com.           | Family Name             | Wattage                   | Voltage                                    | CCT   | Finish                  | Control Mode   |
|----------------|-------------------------|---------------------------|--|---|-------------------------|--|
| LT<br>Lightide | WPSLA<br>Slim Wall Pack | 25W<br>35W<br>70W<br>100W | Blank=100-277VAC<br>MV=347VAC<br>HV=480VAC | 27K=2700K<br>30K=3000K<br>45K=4500K<br>57K=5700K<br>65K=6500K | Blank=Brown<br>BK=Black | DM=0-10VDC Dimming<br>PC=Photocell<br>MS= Motion sensor<br>EM=Emergency Backup |

### PACKAGE

| Model#        | QTY/ Carton | N. W.  | G. W.  | Carton Size |
|---------------|-------------|--------|--------|-------------|
| LT-WPSLA-25W  | 1 piece     | 1.7 Kg | 1.9 Kg | 29x25x23 cm |
| LT-WPSLA-35W  | 1 piece     | 1.7 Kg | 1.9 Kg | 29x25x23 cm |
| LT-WPSLA-70W  | 1 piece     | 3.9 Kg | 4.5 Kg | 57x35x44 cm |
| LT-WPSLA-100W | 1 piece     | 3.9 Kg | 4.5 Kg | 57x35x44 cm |