

LT-UBA SERIES

LED HIGH BAY LIGHT

EMERGENCY BACKUP



20W
Emergency

90MIN.
Emergency

UL
LISTED

100-277V

100-200W

DLC
LISTED
PREMIUM

SMD
LED

160+
LPW

LENS

5
YEARS
WARRANTY

SHARP
60°

WIDE
90°

FLAT
120°

LT-UBA SERIES LED HIGH BAY EMERGENCY BACKUP

UFO LED High Bay Emergency Lights consist of Ni-MH battery for 90-180 minutes emergency mode. It is made of high lumen efficacy up to 160 LPW light source for any application requiring maximum performance and minimum maintenance. The rugged, die-cast aluminum housing and Ip66 waterproof sealed and gasket optics compartment combine to make LED light virtually impenetrable to contaminants. LED light fixture can get the same light intensity as 1000W metal halide lamp for warehouse, parking lot lighting, plant lighting, supermarket, mail and other lighting applications.


Performance

Light Output Efficacy: 160+ lumen/watt
Input Power: 100/150/200
CRI: >80
CCT: CREE 3000K, 4000K, 5000K, 6000K, 6500K
Finish: White
Input Voltage: 100-277vac or 250-520vac
Warranty: 5 years
Mounting: Pendant /Surface mount
Emergency Backup: UL Listed 20W /90 Min.
Dimmable: 0-10V dim available
Certificate : ETL/cETL certified, CE & RoHs
 DLC QPL.

Cover Optional




Clear



Frosted

Dimension

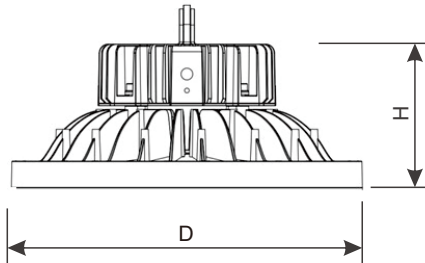


Model#	Watt	Fixture Size (DXH)
LT-UBA280-100W	100W	D280X177 mm
LT-UBA320-150W	150W	D320X188 mm
LT-UBA400-200W	200W	D400X208 mm

Accessories



Aluminum Reflector
(60°/90°)



Polycarbonate Reflector
(60°)



Mounted Bracket



Emergency Backup

Order Information

Sample Number: LT-UBA320-150W-27K-MV-EM

Com.	Family Name	Size	Wattage	CCT	Voltage	Control Mode	Bracket
LT	UBA	280=280mm	100W	27K=2700K	Blank=100-240VAC	DM=0-10VDC Dim	Blank=Hook
Lightide	UFO Bay Light A Type	320=320mm	150W	30K=3000K	UV=100-277VAC	DA=DALI Dim	S=U shape Mount P=Pendent Mount
		400=400mm	200W	40K=4000K	MV= 348VAC	IR= PIR sensor	
				50K=5000K	HV=480VAC	MS= Motion sensor	
				57K=5700K		EM=Emergency Kit	