

LED VAPOR TIGHT LIGHTS EMERGENCY BACKUP



GOOD CONSTRUCTION

5VA & Shatter proof polycarbonate diffuser

EMERGENCY LIGHTING

90~180 minutes of emergency work time.

EXCELLENT PERFORMANCE

Full fixture outputs up to 150 lumens per watt. Replacing up to 4X56W fluorescent fixture by 100W lights led.

ENERGY EFFICIENCY

In extreme contrast to conventional metal-halides, this canopy lights led can bring in 80% of energy savings.

POWER OPTION

20W, 38W, 80W, 100W

LONG LIFETIME

At 8 hours daily use, Lightide' canopy lights LEDs are rated to last 17 years.

5-YEAR WARRANTY

No-compromise warranty covered.

LISTINGS

DLC Premium, ETL/cETL Wet Location. IP65 waterproof.

LED VAPOR TIGHT LIGHTS EMERGENCY BACKUP

LED Vapor Tight Light Emergency backup feature Ni-MH or Lithium battery with discharging time 90~180 min. IK09 and 5VA rated shatter-proof polycarbonate housing is coming with frosty or clear strip cover for option. IP65 rating LED light fixtures are suitable for indoor or outdoor wet/damp usage. High lumen output level up to 150 LPW of led vapor tight light fixtures usually are applied for storage areas, warehouses, shops and garages etc.

Performance

Light Output Efficacy: 130-150 lumen/watt
Input Power: 20/38/50/100 watts
CRI: 80
CCT: 3000K, 4000K, 5000K, 6000K, 6500K
Battery Option: Ni-MH, Li-Fe or Lithium
Input Voltage: 100-277vac
Warranty: 5 years
Mounting: Surface mount
Weight: 2.0 Kg
Discharging Time: 90~180 min.
Charge time: 24 hrs.
Certificate : ETL/cETL certified, CE & RoHs
 DLC premium

Cover Option


Clear Strip Cover



Frosty Cover


Dimension

Unit:mm

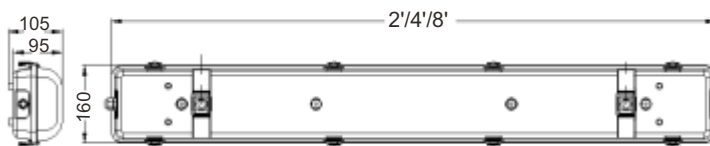

Distribution

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

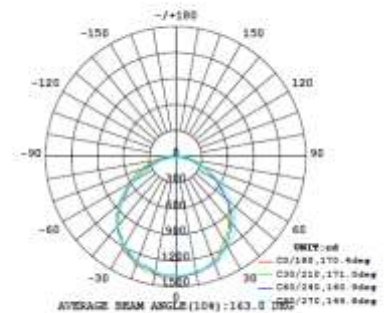

Order Information

Sample Number: LT-TPA456-27K-EM-NM-C

Com.	Family Name	Length	Wattage	CCT	Voltage	Control Mode	Battery Option	Cover
LT	TPA	2=2FT	20=20W	27K=27000K	Blank=100-277VAC	DM=0-10VDC Dim	NM= Ni-MH battery	F= Frosty
Lightide	Vapor Tight Light A Type	4=4FT	36=38W	30K=3000K	HV= 347VAC	PC= Photocell	LF= Li-Fe battery	C= Clear
		8=8FT	56=50W	40K=4000K		MS= Motion sensor	LM= Lithium battery	
			80=80W	50K=5000K		EM=Emergency Backup		
			100=100W	60K=6000K				
			65K=6500K					

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: sales@lightideled.com
 https://www.lightideled.com
 Lightide Manufactory Co., Ltd All right reserved.

