

LT-PTA50

POST TOP LED LUMINAIRE



GOOD CONSTRUCTION

High-duty die-casting aluminum heat dissipation system and shatter-proof optical lens

UNIFORM LIGHT

360 degree illumination and uniform output

EXCELLENT PERFORMANCE

Full fixture outputs up to 110 lumens per watt. Replacing up to 150W MH by 50W led.

ENERGY EFFICIENCY

In extreme contrast to conventional metal-halides, this flood lights led can bring in 90% of energy savings.

POWER

50W

LONG LIFETIME

At 8 hours daily use, Lightide' post top lights LEDs are rated to last 17 years.

5 YEAR UNLIMITED WARRANTY

FULLY WATERPROOF

IP 65 waterproof for outdoor installation.

LISTINGS

ETL/cETL, CE/RoHS

LightIDE

LT-PTA50

POST TOP LED LUMINAIRES

Outdoor Post Top LED Lights are designed with a classic mushroom profile and high output efficiency 110 lumens per watt. 50W post top LED light fixture can replace 100W-150W metal halide post light lamp. Powder-coating finish assures corrosion resistance and long-lasting aesthetics. The Ip65 rating and 5 years warranty are suitable for garden lighting, pathway lighting, park area lighting, parking lot lighting, and other area lightings.


Performance

- Light Output: 110 lumens per watt
- Input Power: 50 watts
- Input Voltage: 100-277vac
- CCT: 3000K, 4000K, 5000K, 5700K
- Mount: Diameter 60mm pole
- Safety Std.: UL1598, CAN/CSA-C.22.2 NO. 250.0, EN61347-1, EN61347-2-13, EN60598-2-1, EN60598-1
- Certificate : ETL/cETL, CE/RoHs
- Weight: 9.0 Kg

Picture



Dimension

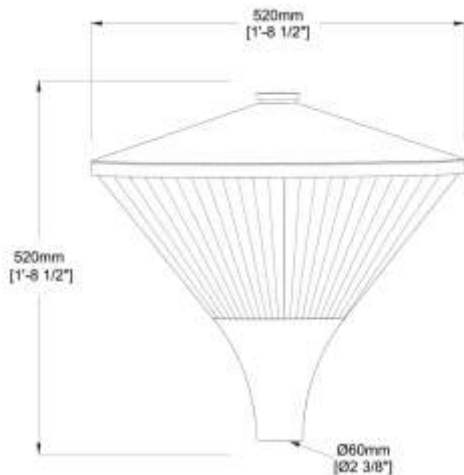

Application



Order Information

Sample Number: LT-PTA50-HV-30K-PC

Com.	Family Name	Watts	Voltage	CCT	Finish	Control Mode
LT Lightide	PTB Post Top led Light B type	50=50W	Blank=100-277VAC HV=200-480VAC	30K=3000K 40K=4000K 50K=5000K 57K=5700K	Blank=Black	PC=Photocell MS= Motion sensor

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: sales@lightideled.com
<https://www.lightideled.com>
Lightide Manufactory Co., Ltd All right reserved.



LIGHTIDE