



CONSTRUCTION & MATERIALS

- ↘ Vandal-proof die-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- ↘ Shock-proof polycarbonate diffuser with UV inhibitors
- ↘ IP 65 rating waterproof protection
- ↘ Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- ↘ Internal UL approved Meanwell or equivalent driver

MOUNTING

- ↘ Surface Mount

ENVIRONMENTAL SYSTEM

- ↘ Indoor or Outdoor wet/damp location. IP 65waterproof

FINISH

- ↘ Bronze

ELECTRICAL SYSTEM

- ↘ Input voltage 100-277VAC/250-480VAC, 50/60Hz
- ↘ ETL/cETL/CE/Rohs, DLC premium

OPTICAL SYSTEM

- ↘ LM 80 SMD LED
- ↘ Color temperature: 3000K, 4000K, 5000K, 5700K.
- ↘ 120 lumens per watt

LIGHTING CONTROL

- ↘ 0-10vdc/PWM dimming
- ↘ Motion sensor
- ↘ Photocell

WARRANTY

5 Years

LED Canopy luminaire provides vandal-proof aluminum alloy heat sink and high shatter-proof polycarbonate diffuser. Powder-coating finished housing and sealed gasket especially are suitable for indoor or outdoor corrosion and wet/damp location. Occupancy sensor can be used for parking garage lighting, gas station, warehouse, mail and others.

Performance


Light Output: 4,800- 10,500 lumens
Input Power: 40/60/90 watts
CRI: 70
CCT: 3000K, 4000K, 5000K, 5700K
Finish: Bronze
Input Voltage: 100-277vac or 250-480vac
Warranty: 5 years
Mounting: Surface mount
Weight: 4.2 Kg
Dimming: 0-10V available
Certificate : ETL/CETL , CE/RoHs
 DLC premium

Refractor Option



Low Profile (ETL/cETL DLC PREMIUM)
High Profile (ETL/CETL)


Dimension (Low Profile)

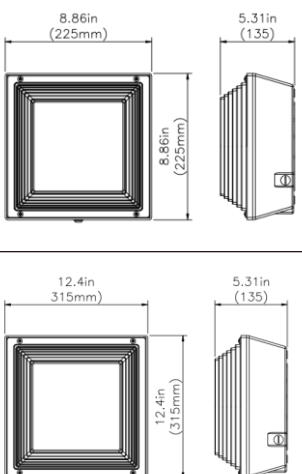

LT-SGSAL-40W
 8.86in (225mm) x 8.86in (225mm) x 5.31in (135mm)

LT-SGSAL-60W
LT-SGSAL-90W
 12.4in (315mm) x 12.4in (315mm) x 5.31in (135mm)

Occupancy Sensor

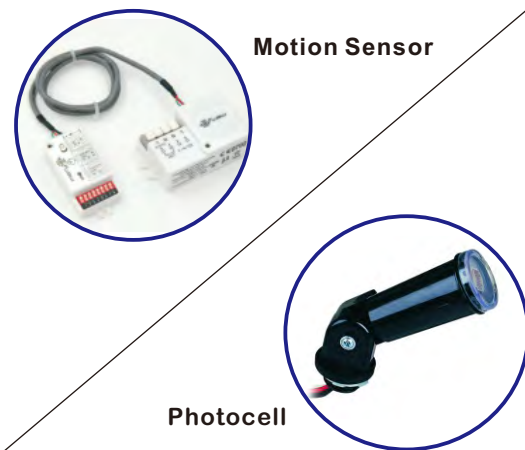

Motion Sensor
Photocell

Order Information

Sample Number: LT-SGSAL-40W-HV-30K-EM

Com.	Family Name	Cover Type	Watts	Voltage	CCT	Finish	Control Mode
LT Lightide	SGSA Square Gas Station Light Type A	H=High L=Low	40W 60W 90W	Blank=100-277VAC	30K=3000K 40K=4000K 50K=5000K 57K=5700K	Blank=Bronze	DM=0-10VDC Dimming PC=Photocell MS= Motion sensor EM= Emergency

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: info@lightide-tech.com
<https://www.lightideled.com>
 Lightide Manufactory Co., Ltd All right reserved.

