


Quartersphere  
LT-WPCQ



LT-WPCR  
Radius

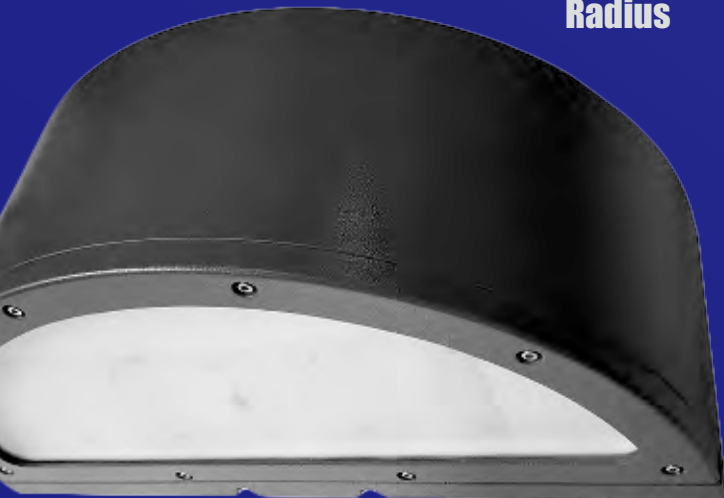

**CONSTRUCTION & MATERIALS**

- Dia-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- Impact-proof and shatter-proof glass cover
- IP 65 rating waterproof protection
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- Internal UL approved power supply
- Full cutoff style

**MOUNTING AND WIRING**

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

**ENVIRONMENTAL SYSTEM**

- Outdoor wet/damp location

**FINISH**

- Bronze

**ELECTRICAL SYSTEM**

- Input voltage 100-277VAC or 347-480VAC
- DLC qualified, ETL/cETL
- CE/Rohs

**OPTICAL SYSTEM**

- 120 lm/w output efficacy
- Color temperature: 3000K, 4000K and 5000K. Other color temperature available for special order, consult factory for lead time.
- Outdoor Cutoff Wall-Mounted Area Luminaires

**LIGHTING CONTROL**

- 0-10vdc dimming available
- Motion sensor available
- Photocell available

**WARRANTY**

5 Years

# LT-WPCR/Q Series FULL CUTOFF LED WALL PACK LIGHT

LED Wall Pack Lights provides new round heat sink design, which made of die-casting aluminum alloy and glass cover coming with full cutoff style. Powder-coating finished housing and sealed gasket for Ip65 rating especially are suitable for outdoor corrosion and wet/ damp location. Motion sensor and photocell sensor can be optional application for building, parking lot lighting, square, road and others.

### Performance

**Light Output:** 120 lumen/watt  
**Input Power:** 30W, 40W, 60W, 80W, 100W  
**CRI:** 70  
**CCT:** 3000K, 4000K, 5000K, 6000K  
**Finish:** Bronze  
**Input Voltage:** 100-277vac  
**Warranty:** 5 years  
**Mounting:** Surface mount  
**Weight:** 5 Kg max.  
**Certificate :** ETL/cETL, DLC certified, CE/RoHs

### Picture


Radius

Quartersphere

### Dimension (mm)

Radius

Quartersphere

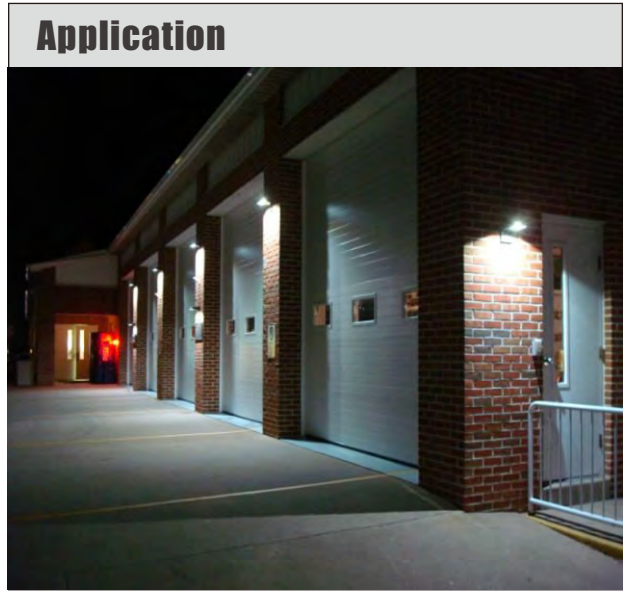

### Order Information

Sample Number: LT-WPCQ-80W-30K-LF-DM

Com.	Family Name	Wattage	Voltage	CCT	Emergency Battery	Control Mode
LT Lightide	WPCQ = Quatersphere	30W	Blank=100-277VAC	30K=3000K	NM= Ni-MH	DM=0-10VDC Dimming
	WPCR = Radius	40W	MV= 347VAC	40K=4000K	LF= Li-Fe	PC=Photocell
	Wall Pack CUTOFF	60W	HV=480VAC	50K=5000K	LM=Lithium	MS= Motion sensor
	Q/R TYPE	80W		57K=5700K		
		100W				

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: sales@lightideled.com  
<https://www.lightideled.com>  
 Lightide Manafactory Co., Ltd All right reserved.

