

Catalog #

Type

Full Cutoff

Note

Ver A 2019-02

FULL CUT-OFF LED WALL PACKS (WPCR/Q Series)

DESCRIPTION

LED Wall Pack Lights provides classic full cut-off style made of die-casting aluminum alloy and glass cover. Powder-coating finished housing and sealed gasket for Ip65 rating especially are suitable for outdoor corrosion and wet/ damp location. Motion sensor and photocell sensor can be optional application for building, parking lot lighting, square, road and others.

CONSTRUCTION & MATERIALS

- Dia-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- Impact-proof and shatter-proof glass cover
- IP 65 rating waterproof protection
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- Internal UL approved power supply
- Full cut-off style

MOUNTING AND WIRING

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

ENVIRONMENTAL SYSTEM

- Outdoor wet/damp location

FINISH

- Bronze (default)
- Black or White for option

ELECTRICAL SYSTEM

- Input voltage 100-277VAC or 200-480VAC
- ETL/cETL
- CE/RoHs

OPTICAL SYSTEM

- 140 lm/w output efficacy
- Color temperature: 3000K, 4000K and 5000K. Other color temperature available for special order, consult factory for lead time.
- High quality tempered clear glass lens
- Downward throw lighting distribution for area lighting
- Outdoor Cutoff Wall-Mounted Area Luminaires

LIGHTING CONTROL

- 0-10vdc dimming available
- Motion sensor available
- Photocell available
- Emergency backup available

WARRANTY

5 Years

Quartersphere

LT-WPCQ





Radius

LT-WPCR



DIMENSION

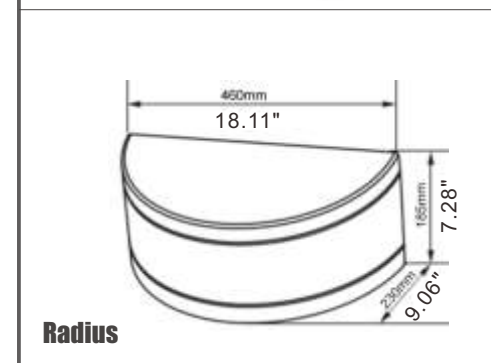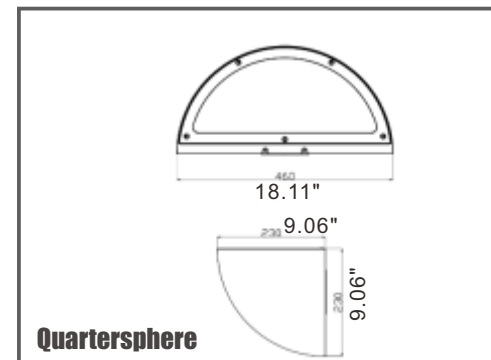



Catalog #

Type

Full Cutoff

Note

Ver A 2019-02

FULL CUT-OFF LED WALL PACKS (WPCR/Q Series)

DATA SHEET

Model#	LT-WPCR/Q-30W	LT-WPCR/Q-40W	LT-WPCR/Q-60W	LT-WPCR/Q-80W	LT-WPCR/Q-100W
Rating	32W	42W	62W	82W	105W
Lumen Output	4200 lm	5790 lm	7300 lm	11080 lm	14500 lm
Input Voltage	100-277VAC, 200-480VAC				
Power Factor	0.98at 100VAC 0.90 at 277VAC				
LED & CCT	Philips LED, 3000K/4000K/5000K/5700K				
CRI	>70				
L70	>50,000 hrs				
Operating Temp.	-30°C~+50°C				
Store Temp.	-40°C~+60°C				
Material	die-cast aluminum body, Glass cover				
Installation	wall surface				
Warranty	5 Years				
Environment	Suitable for damp/wet locations, IP 65 outdoor				
Certification	ETL/cETL, CE/RoHs				

ORDER INFORMATION

Sample Number: LT-WPCR-60W-30K-BK-DM

Com.	Family Name	Profile	Wattage	Voltage	CCT	Finish	Control Mode
LT Lightide	WPC Wall Pack CUTOFF	R=Radius Q=Quartersphere S=Square	30W 40W 60W 80W 100W	Blank=100-277VAC HV=200-480VAC	30K=3000K 40K=4000K 50K=5000K 57K=5700K	Blank=Bronze WH=White	DM=0-10VDC Dimming PC=Photocell MS= Motion sensor EM=Emergency Backup

PACKAGE

Model#	QTY/ Carton	N. W.	G. W.	Carton Size
LT-WPCR series	1 piece	13 lbs	14.5 lbs	52X24X29 cm
LT-WPCQ series	1 piece	13 lbs	14.5 lbs	52X24X29 cm