



### Full-Cutoff



### Features

Style	Full Cutoff
Diffuser	Shatter-proof PC
Housing	Aluminum Alloy
Waterproof	IP65
Lumen Efficacy	120 LPW
Wattage	30W, 60W, 80W, 100W, 120W
Color Temperature	3000K, 4000K, 5000K, 5700K
Motion Sensor	Occupancy
Photocell	Available
Emergency Backup	UL924, CEC Title-20
Listed	ETL/cETL, CE, RoHS
Warranty	5 Years




Optional Photocell Dusk-Dawn




Optional EM Battery

### Distribution

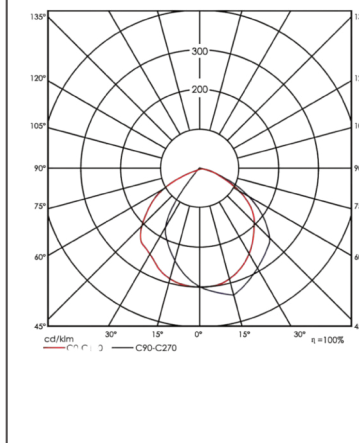

### Dimension

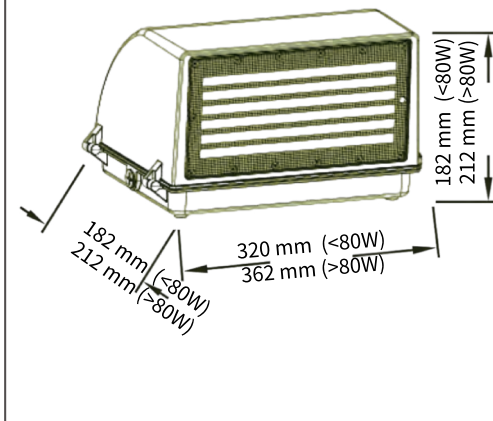

### Certificate:



### Specification

Model#	Input Voltage	Power	Light Efficacy	Beam Angle	CRI	Equv.
LT-WPCA-30W	100-277VAC	30W	120 LPW	120	>70	75-100W MH
LT-WPCA-60W	100-277VAC	60W	120 LPW	120	>70	175-250W MH
LT-WPCA-80W	100-277VAC	80W	120 LPW	120	>70	250-400W MH
LT-WPCA-100W	100-277VAC	100W	120 LPW	120	>70	400W MH
LT-WPCA-120W	100-277VAC	120W	120 LPW	120	>70	400-600W MH

### Order Information

For example: LT-WPCA-60W-HV-30K-PC-EM

Company	Series	Power	Input Voltage	CCT	Control
LT	WPCA	35W	Std.=100-277VAC	27K=2700K	DM=1-10DC Dim
		60W	HV=200-480VAC	30K=3000K	PC=Photocell
		80W	EV=200-240VAC	40K=4000K	MS=Motion Sensor
		100W		50K=5000K	EM=Emergency Kit
		120W		57K=5700K	