



➤ **CONSTRUCTION & MATERIALS**

- Unique design aluminum alloy heat sink dissipation
- IP 69K waterproof protection for wet and damp location usage
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- 1-10VDC dimming mode available
- L70 > 50,000 hrs
- Wash directly

INSTALLATION MOUNTING

- Pendant

CERTIFIED GUARANTEE

- NSF
- ETL/cETL listed

ELECTRICAL SYSTEM

- Widely Input voltage: 100-240VAC/277VAC -480VAC
- Power chosen from 100W, 120W, 150W,

MANY OPTICAL SYSTEM OPTION

- Lens of Beam angle: 45°, 90° and 120°
- Output 140 lm/w

LONG WARRANTY

5 Years

LT-HBPH SERIES IP69K UFO LED HIGH BAY LIGHT

UFO LED High Bay Light features high lumen efficacy 140+ LPW of SMD LED for any application requiring maximum performance and minimum maintenance. The IP69K sealed and gasket optics compartment combine to make LED light virtually impenetrable to contaminants. LED light fixture can get the same light intensity as 400W metal halide lamp for warehouse, parking lot lighting, plant lighting, supermarket, mail and other lighting applications.


Performance

Output Efficacy: 140+ LPW or 160 LPW
Input Power: 80W/100W/120W/150W
CRI: 80
CCT: 3000K, 4000K, 5000K, 6000K, 6500K
Finish: White
Input Voltage: 100-277vac/277-480vac
Warranty: 5 years
Mounting: Pendant mount
Weight: 6.0 Kg for one module.
Certificate : NSF, ETL/cETL, CE & RoHs

Housing Optional



Dimension

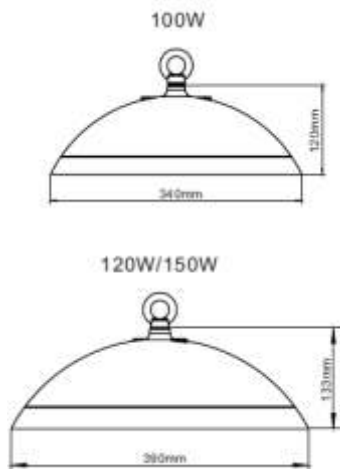

Beam Angle



Order Information

Sample Number: LT-HBPH-150W-27K-HV-DM

Com.	Family Name	Wattage	CCT	Voltage	Control Mode	Finish
LT	HBPH	80W	27K=2700K	Blank=100-277VAC HV=277-480VAC	DM=0-10VDC Dim DA=DALI Dim IR= PIR sensor MS= Motion sensor EM=Emergency Kit	White
Lightide	UFO Bay Light	100W	30K=3000K			
		120W	40K=4000K			
		150W	57K=5700K 65K=6500K			