





### Distribution

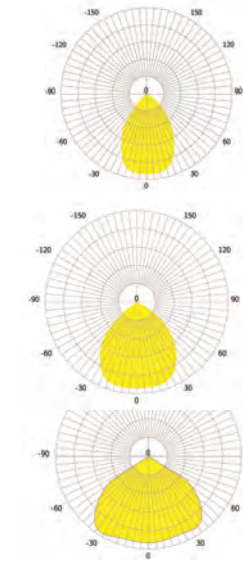

### Dimension

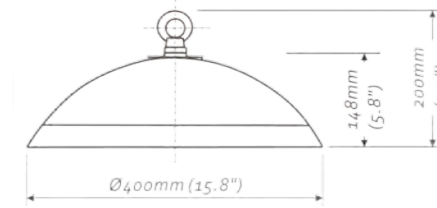

### Certificate:



## Features

Style	Food Grade UFO LED
Waterproof	IP65 Rated
IP69K	Resist 100 Bar & 80 deg.C hot water
Lumen Efficacy	Up to 210 LPW
Housing	Aluminum Alloy
Diffuser	Shatter-proof PC
Wattage	100W-150W-200W Selectable
Color Temperature	3000K-4000K-5000K Selectable
Sensor	Microwave motion/photocell
Beam Angle	60/90/120 deg.
Emergency Backup	UL924, CEC Title-20
Listed	NSF, ETL/cETL, CE, RoHS
Warranty	5 Years

## Specification

Model#	Input Voltage	Power	Beam Angle	Light Efficacy	CCT	Equv.
LT-LBA100	100-277VAC	100W	60/90/120	210 LPW	30K, 40K,50K,57K	400W MH
LT-LBA150	100-277VAC	150W	60/90/120	210 LPW	30K, 40K,50K,57K	600W MH
LT-LBA200	100-277VAC	200W	60/90/120	210 LPW	30K, 40K,50K,57K	1000W MH
LT-LBA150CPT	100-277VAC	100W-120W-150W Tunable	60/90/120	150 LPW	30K-40K-50K Tunable	400W MH

## Order Information

For example: LT-UBA320BC-150W-HV-30K-PC-EM

Com.	Series	Power	Input Voltage	CCT	Control	Duration (EM)
LT	LBA	100	Std.=100-277vac	30K=3000K	MS=Motion Sensor	Std.= 90minutes
		150	HV= 200-480VAC	40K=4000K	DM=1-10DC Dim	2H= 120 minutes
		200		50K=5000K	PC=Photocell	3H= 180 minutes
		150CP= 100W-120W-150W Tunable		T= 30K-40K-50K Tunable	EMH=Emergency Kit	

Clear Reflector Option



Motion Sensor (MS)



CCT & Power Tunable (CPT)

