



TPA Series

Vapor-Tight LED Garage Light



TPA

LED Garage Light



LED garage lights are surface mount or suspended overhead ceiling lights ideal for task and general ambient lighting. These led garage lighting is commonly used for mechanic shops, workstations, home garages and storage rooms.

Vapor-tight linear LED Garage Lights 4ft feature power selectable ranges of 32-40-50 watts and CCT selectable ranges of 3000K-4000K-5000K. And they also are built with a 1-10vdc dimming and motion sensor. Therefore, these linear garage led lights are powerful lighting in harsh environments, protecting the light source from dust and moisture.

TPA

LED Garage Light



Optional Conduit Mount

Optional Battery

Switch to emergency mode automatically when power is off to keep safe in time.

Emergency Switch

Std. push-button for checking if it can work in emergency mode. Integrated with indicator lamp.

Housing

- 5VA Rated
- waterproof IP 66 rated

LED Driver

(CCT & Power Selectable Switch)



Mount Clips

LED Chip

LM 80 High efficacy of SMD LED chips. High efficacy LED boards with dual copper cladding for thermal dissipation

Optional Motion Sensor

- ON/OFF
- Bi-lever
- Dusk-Dawn



Cover

Unique polycarbonate lens distribution design clear or frosty for option.

Model #	LT-TPA Series
Rated	Vapor Tight
Version	A1: 2022-01

DESCRIPTION

LED Garage Lights 4ft can be adjustable power ranged from 32watts, 40 watts to 50 watts and CCT changed from 3000K, 4000K and 5000K. And they also are built with a standard 1-10vdc dimming driver. In addition, the fixtures feature vapor-tight rated housing, which also are IK08 and V0 rated and coming with frosty or clear strip cover for option. Waterproof Ip66 rated fixtures are suitable for indoor or outdoor wet/damp usage. High lumen output level up to 150 LPW of led vapor tight light fixtures usually are applied for storage areas, warehouses, shops and garages etc.

CONSTRUCTION & MATERIALS

- ◆ IK 08 & V0 shatter-proof polycarbonate housing
- ◆ Lm80 SMD 2835 LED with Ra>80
- ◆ Shatter-proof & Frosty cover
- ◆ Junction Box mount bracket
- ◆ Stainless steel fastener

INSTALLATION

- ◆ Chain Pendant/Surface mounted

ENVIRONMENTAL SYSTEM

- ◆ IP 66 rated for wet and damp location usage
- ◆ Indoor/outdoor wet/damp location
- ◆ Ambient Temp.: -30°C - +50°C (-22°F -122°F)

FINISH

- ◆ Grey

ELECTRICAL SYSTEM

- ◆ Input voltage 100-277VAC, 50/60Hz
- ◆ ETL/cETL listed,
- ◆ CE/RoHS
- ◆ DLC QPL

OPTICAL SYSTEM

- ◆ 130 LPW /150 LPW.
- ◆ CCT selected range from 3000K-4000K-5000K
- ◆ Beam angle 165°x120°

LIGHTING CONTROL

- ◆ 0-10vdc dimming available
- ◆ Power selected from 32W-44W-50W
- ◆ Microwave motion sensor available
- ◆ Photocell for dusk-dawn work mode available

WARRANTY

- ◆ 5 Years

STANDARD

- ◆ EN61347-1, EN61347-2-13, EN60598-2-1, EN60598-1
- ◆ UL 924, UL 1598, CAN/CSA -C.22.2 NO. 250.0,



POWER SELECTABLE



CCT SELECTABLE



DATASHEET

Model#	LT-TPA220	LT-TPA436	LT-TPA436-CP(T)	LT-TPA456	LT-TPA810
Input Voltage	100-277vac	100-277vac	120-347vac	100-277vac	100-277vac
Rated Power	20W	40W	Selectable 32W-44W-50W	50W	100W
Output Efficacy	130/150 LPW	130/150 LPW	130/150 LPW	130/150 LPW	130/150 LPW
CRI	>80	>80	>80	>80	>80
Beam Angle	120°	120°	120°	120°	120°
CCT	3000K/4000K/5000K	3000K/4000K/5000K	Selectable 3000K-4000K-5000K	3000K/4000K/5000K	3000K/4000K/5000K
L70 Life	>50,000hrs	>50,000hrs	>50,000hrs	>50,000	>50,000hrs
Optional Battery	Lithium/Ni-MH	Lithium/Ni-MH	Lithium/Ni-MH	Lithium	Lithium/Ni-MH
Duration (minutes)	90 (120/180 Options)	90 (120/180 Options)	90 (120/180 Options)	90 (120/180 Options)	90 (120/180 Options)
Housing	UL94-V0 Rated	UL94-V0 Rated	UL94-V0 Rated	UL94-V0 Rated	UL94-V0 Rated
Cover	PC (frosty, clear)	PC (frosty, clear)	PC (frosty, clear)	PC (frosty, clear)	PC (frosty, clear)
Certificate	ETL/cETL, CE/RoHS,DLC	ETL/cETL, CE/RoHS,DLC	ETL/cETL, CE/RoHS	ETL/cETL, CE/RoHS, DLC	ETL/cETL, CE/RoHS

ORDER INFORMATION

Sample Number: LT-TPA436-CPT-MS-EM-2H-C

Com	Family Name	Length	Wattage	CCT	Control Mode	Duration (EM)	Cover
LT	TPA	2=2FT 4=4FT 8=8FT	20=20W 36=40W 36CP=Power Selected: 32W-44W-50W 56=50W 10=100W	30K=3000K 40K=4000K 50K=5000K T=3000K-4000K-5000K Selectable	MS=Motion Sensor EM=Emergency Backup	Std.= 90 minutes 2H= 120 minutes 3H= 180 minutes	Blank= Frosty C=Clear

TPA


LED Parking Garage Light

4 FT | Vapor Tight | Emergency | CCT & Power Selectable


Model #	LT-TPA Series
Rated	Vapor Tight
Version	A1: 2022-01

DIMENSION

MODEL# LT-TPA220/436

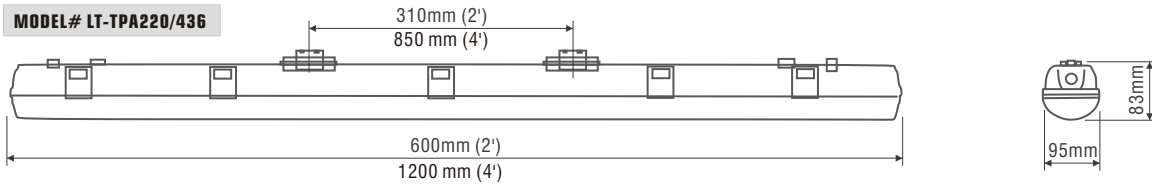

MODEL# LT-TPA810

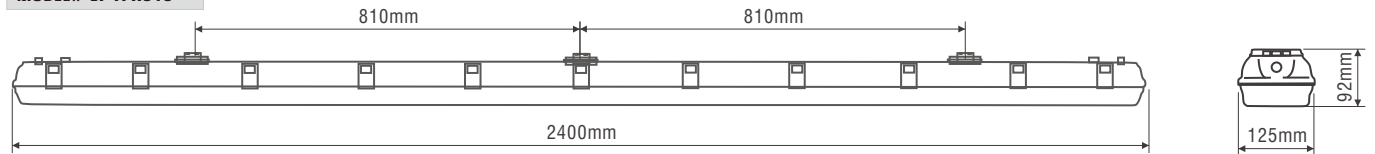


PACKAGE


NO.	Model#	Carton Size (LXWXH)	G. W. / CTN	QTY/CTN (PCS)
1	LT-TPA220	68X31X34	9 Kg	6
2	LT-TPA436(CPT)/456	128X35X33cm	19.5 Kg	9
3	LT-TPA810	248X31X25	24 Kg	4

PHOTOMETRICS (FROSTY COVER)

MODEL# LT-TPA456 49W 4000K 6298 Lumens


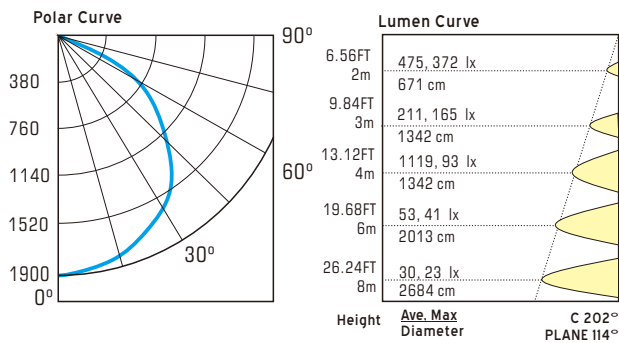


MODEL# LT-TPA436 40W 4000K 5169 Lumens

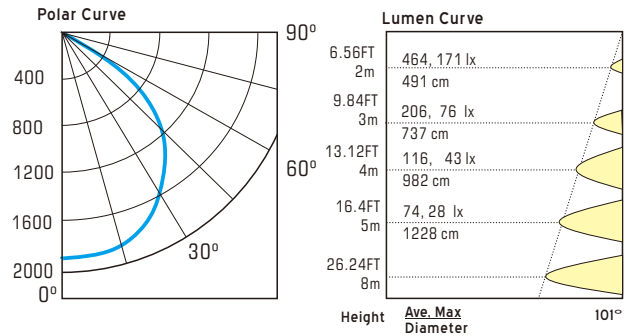

MOUNT GUIDE

This LED garage light is easily installed to the ceiling with a built-in ring. No hard-wiring is needed. A lot of time and labor costs will be saved.

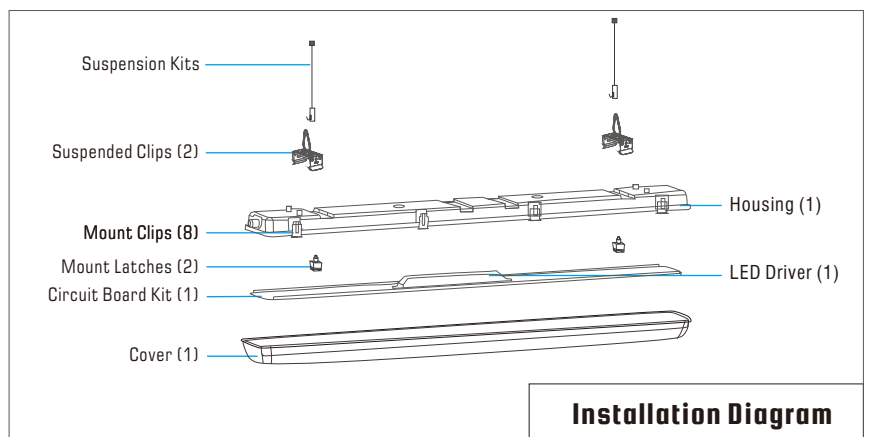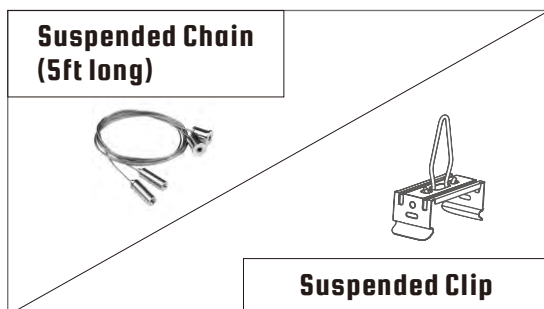

Model #	LT-TPA Series
Rated	Vapor Tight
Version	A1: 2022-01

OPTIONAL MOTION SENSOR

Motion Sensor is a moving object sensor that can detect range of 360° and its working frequency is 5.8GHz. The advantage is stable working state (stable working temperature: -40°C ~ +70°C), adopts a microwave sensor (high-frequency output < 0.2mW), so that it is safe and performs better than infrared sensor.

Features

- Fully adjustable high and low dimmed light levels from 0-10VDC
- Designed for LED fixtures; rated for extreme temperatures and up to 200,000 on/off cycles
- Adjustable via handheld wireless configuration tool
- Adjustable time delay and cut off delay from 10 seconds to 60 minutes
- Provides line voltage On/Off switching and 0-1 0VDC dimming control
- Works with ballasts or LED drivers
- Adjustable ramp up and fade down times
- High inrush stability zero crossing circuitry for reliable, long-life operation catching relay is durable for all load

Daylight Harvest Function

This function inside the motion sensor to achieve tri-level control, for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100% --> dimmed light (natural light is insufficient) --> off; And 2 periods of selectable waiting time: motion hold-time and stand-by period; Selectable daylight threshold and freedom of detection area.



ON-OFF MODE

The microwave sensor to achieve tri-level dimming control, for same areas that require a light change notice before switch off.



With sufficient ambient light, the sensor does not switch on the lamp.



With insufficient ambient light, the sensor switches on the lamp when motion is detected.




After hold time, the lamp gradually dims down if no motion detected.

3-STEP DIMMING MODE


It offers 3 levels of the light Control: 100%-dimming light (0,10%,30%,50%) --off; and 2 periods of selectable waiting time: motion hold-time and stand-by time. Selectable daylight threshold and choice of detection area.



With sufficient ambient light, the sensor does not switch on the lamp.



With insufficient ambient light, the sensor switches on the lamp when motion is detected.



After hold time, the sensor dims the lamp at a low light level if no new motion trigger.



After stand-by period, the sensor switches off the lamp if no motion is detected in its detection zone.

OPTIONAL EM BATTERY

When the AC power goes out, the emergency driver detects the AC power outage and automatically switch to the working emergency mode. The green LED light off. When the AC power is restored, the emergency driver backs to AC power working and starts re-charging, the green LED light on.

Features

- Meet most of safety standards for lighting
- Battery protections over charge protection over discharge protection short circuit protection
- Standard CSA C22.2 NO.141, UL924
- External Li-ion, LiFePO4 or Ni-MH battery
- The batteries Meet 500 cycles of standard CH and standard DCH
- Indicator shows a variety working modes
- RoHS compliant
- Standard 1.5 hours (2 hrs, 3hrs for options)

Specifications

- Input Voltage: 100-277Vac, 50/60Hz
- AC Input Current: 100mA max.
- AC Input Power Rating: 7.0W max.
- Output Current and Voltage: 25-48Vdc
- Output Power: 8W /15W
- Emergency Time: ≥1.5H
- Full Warranty: 5 Years
- Test Switch Indicator Light
- Illuminated Test Switch, indicator Light

