



## CONSTRUCTION & MATERIALS

- ↘ Dia-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- ↘ Impact-proof and shatter-proof glass cover
- ↘ IP 65 rating waterproof protection
- ↘ Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- ↘ Internal UL approved power supply
- ↘ Full cutoff style

## MOUNTING AND WIRING

- ↘ Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

## ENVIRONMENTAL SYSTEM

- ↘ Outdoor wet/damp location

## FINISH

- ↘ Bronze /Black

## ELECTRICAL SYSTEM

- ↘ Input voltage 100-277VAC or 347-480VAC
- ↘ DLC qualified, ETL/cETL
- ↘ CE/Rohs

## OPTICAL SYSTEM

- ↘ 120 lm/w output efficiency
- ↘ Color temperature: 3000K, 4000K and 5000K. Other color temperature available for special order, consult factory for lead time.
- ↘ Outdoor Cutoff Wall-Mounted Area Luminaires

## LIGHTING CONTROL

- ↘ 0-10vdc dimming available
- ↘ Motion sensor available
- ↘ Photocell available

## WARRANTY

5 Years

# LT-WPCA Series FULL CUTOFF LED WALL PACK LIGHT

LED Wall Pack Lights provides new heat sink design made of die-casting aluminum alloy and polycarbonate lens coming with full cutoff style. Powder-coating finished housing and sealed gasket for Ip65 rating especially are suitable for outdoor corrosion and wet/ damp location. Motion sensor and photocell sensor can be optional application for building, parking lot lighting, square, road and others.


## Performance

**Light Output:** 120 lumen/watt  
**Input Power:** 42W, 60W, 80W, 100W  
**CRI:** 70  
**CCT:** 3000K, 4000K, 5000K, 6000K  
**Finish:** Bronze /Black  
**Input Voltage:** 100-277vac  
**Warranty:** 5 years  
**Mounting:** Surface mount  
**Weight:** 5 Kg max.  
**Certificate :** ETL/cETL, DLC certified, CE/RoHs

## Picture



## Dimension (mm)

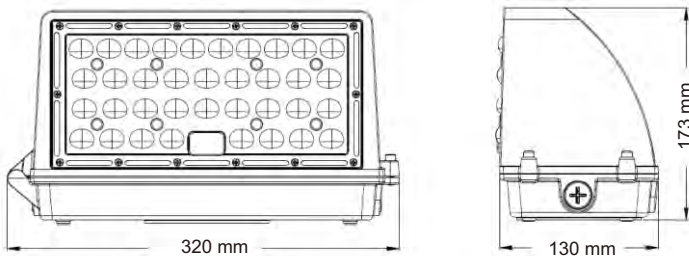

## Accessory



Photocell

## Order Information

Sample Number: LT-WPCA-80W-30K-BK-DM

Com.	Family Name	Wattage	Voltage	CCT	Finish	Control Mode
LT	WPCA	42W	Blank=100-277VAC	30K=3000K	Blank=Bronze	DM=0-10VDC Dimming
Lightide	Wall Pack CUTOFF A TYPE	60W	MV= 347VAC	40K=4000K	WH=White	PC=Photocell
		80W	HV=480VAC	50K=5000K		MS= Motion sensor
		100W		57K=5700K		

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: [info@lightideled.com](mailto:info@lightideled.com)

<https://www.lightideled.com>

Lightide Manafactory Co., Ltd All right reserved.

