

LED WALL PACK LIGHT (MINI)

DESCRIPTION

MINI LED Wall Pack Light provides small profile dia-casting aluminum alloy heat sink and shatter-proof PC diffuser. Powder-coating finished housing and sealed gasket especially are suitable for outdoor corrosion and wet/ damp location. Photocell sensor can be optional application for entrance, building, parking lot lighting, square, road and others.

CONSTRUCTION & MATERIALS

- ◆ Dia-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- ◆ Impact-proof and shatter-proof polycarbonate diffuser
- ◆ IP 65 rating waterproof protection
- ◆ Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- ◆ Internal UL approved power supply

MOUNTING AND WIRING

- ◆ Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

ENVIRONMENTAL SYSTEM

- ◆ Outdoor wet/damp location

FINISH

- ◆ Bronze

ELECTRICAL SYSTEM

- ◆ Input voltage 100-277VAC, 200-480VAC
- ◆ ETL/cETL
- ◆ CE/RoHS

OPTICAL SYSTEM

- ◆ 120 lm/w output efficacy
- ◆ Color temperature: 3000K, 4000K and 5000K, 5700K. Other color temperature available for special order, consult factory for lead time.
- ◆ Outdoor Cutoff Wall-Mounted Area Luminaires

LIGHTING CONTROL

- ◆ 0/1-10vdc dimming available
- ◆ Photocell

STANDARD

- ◆ EN61347-1, EN61347-2-13, EN60598-2-1, EN60598-1
- ◆ UL 1598, CAN/CSA -C.22.2 NO. 250.0,
- ◆ EN55015, EN61547, EN61000-3-2/3, FCC part 15, ICES-005

APPLICATION

- ◆ parking lots,
- ◆ entrances,
- ◆ building flood lights,
- ◆ aisle environments

WARRANTY


- ◆ 5 Years

PACKAGE


MODEL #	QTY / CARTON	G. W.	CARTON SIZE
LT-WP02A-12W	20 pieces	11.0 Kg	75X35X28 cm
LT-WP02A-18W/26W	10 pieces	12.5 Kg	64X39X31 cm



DIMENSION

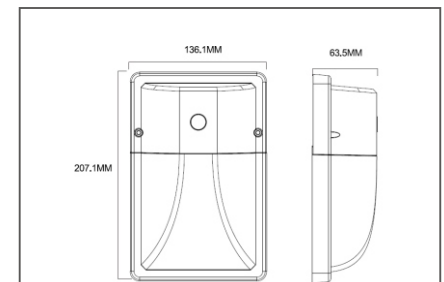

LT-WP02-12W

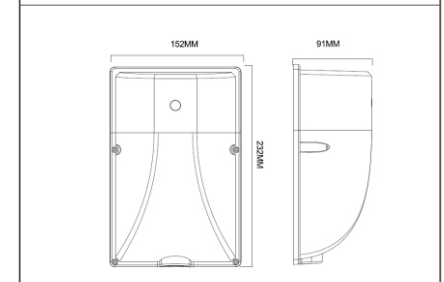

LT-WP02-18W/30W

DATA SHEET

MODEL#	LT-WP02-12W	LT-WP02-18W	LT-WP02-30W
LUMEN OUTPUT	1400lm	2160 lm	3120 lm
INPUT VOLTAGE	100-277VAC	100-277VAC	100-277VAC
POWER FACTOR	0.90	0.90	0.90
CRI	>70	>70	>70
L70	>50,000 hrs	>50,000	>50,000
OPERATING TEMP.	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C
STORE TEMP.	-40°C~+60°C	-40°C~+60°C	-40°C~+60°C
PACKAGE	CTN: 64X39X32CM, 12.5Kg/CTN. 10PCS/CTN		
INSTALLATION	Recessed outlet box or wall surface		

ORDER INFORMATION

Sample Number: LT-WP02-18W-27K-PC

COM.	FAMILY NAME	WATTAGE	CCT	CONTROL MODE
LT	WP02	12W	30K=3000K	PC=Photocell
		18W	40K=4000K	
		30W	50K=5000K	
			60K=6000K	

APPLICATION

