

# Power & CCT Selectable LED Garage Light

DLC Qualified | 4 FT | Vapor Tight

<b>Model #</b>	LT-TPA436CP(T)
<b>Rated</b>	VAPOR TIGHT
<b>Version</b>	B: 2021-08

## DESCRIPTION

LED Garage Lights 4ft can be adjustable power ranged from 32watts, 34 watts to 50 watts and CCT changed from 3000K, 4000K and 5000K. And they also are built with a standard 1-10vdc dimming driver. In addition, the fixtures feature vapor-tight rated housing, which also are IK09 and 5VA rated and coming with frosty or clear strip cover for option. Waterproof Ip65 rated fixtures are suitable for indoor or outdoor wet/damp usage. High lumen output level up to 150 LPW of led vapor tight light fixtures usually are applied for storage areas, warehouses, shops and garages etc.

### CONSTRUCTION & MATERIALS

- ◆ IK 09 & 5VA shatter-proof polycarbonate housing
- ◆ IP 65 waterproof protection for wet and damp location usage
- ◆ Frosty or clear strip cover
- ◆ Shatter-proof Polycarbonate lens
- ◆ Stainless steel fastener

### INSTALLATION

- ◆ Chain Pendent/Surface mounted

### ENVIRONMENTAL SYSTEM

- ◆ IP 65 rated waterproof
- ◆ Indoor/outdoor wet/damp location

### FINISH

- ◆ Grey

### ELECTRICAL SYSTEM

- ◆ Input voltage 120-347VAC, 50/60Hz
- ◆ ETL/cETL listed,
- ◆ CE/RoHS
- ◆ DLC QPL

### OPTICAL SYSTEM

- ◆ 130 LPW /150 LPW.
- ◆ CCT selected range from 3000K-4000K-5000K
- ◆ Beam angle 120°

### LIGHTING CONTROL

- ◆ 0-10vdc dimming available
- ◆ Power selected from 32w-44w-50w
- ◆ Microwave motion sensor available
- ◆ Photocell for dusk-dawn work mode available

### WARRANTY


- ◆ 5 Years

### STANDARD


- ◆ EN61347-1, EN61347-2-13, EN60598-2-1, EN60598-1
- ◆ UL 924, UL 1598, CAN/CSA -C.22.2 NO. 250.0,




## DIMENSION (Unit: mm)

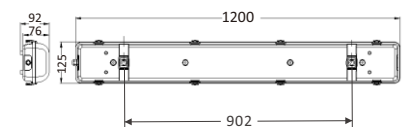


## LIGHT DISTRIBUTION CURVE

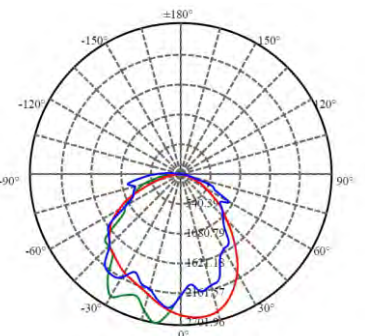

## LUX DIAGRAM

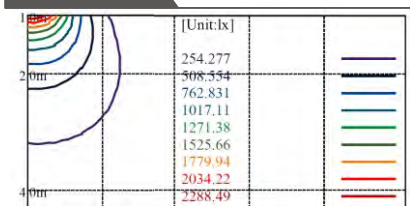

## LUX DISTANCE CURVE

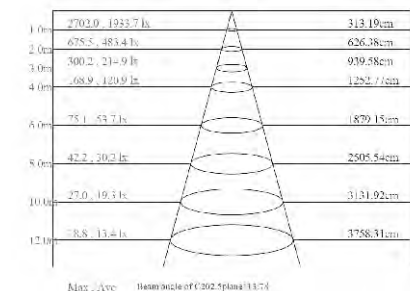

Note: Above diagrams are based on 50 watts.

## DATA SHEET

Model#	Voltage	Size (AXBXC)	Power Range	CCT	Lumen Efficacy
LT-TPA436-CP	120-347vac	1000x125X92 mm	Changing 32W-44W-50W	3000K/4000K/5000K	150 LPW (Clear) 130 LPW (Milky)
LT-TPA436-CPT	120-347vac	1000x125X92 mm	Changing 32W-44W-50W	Selected 3000K-4000K-5000K	150 LPW (Clear) 130 LPW (Milky)

## ORDER INFORMATION

Sample Number: LT-TPA436-CP-27K-MS-F

Com.	Family Name	Length	Wattage	CCT	Control Mode	Cover
LT	TPA	4=4FT	36CP=Power Selected: 32W-44W-50W	30K=3000K 40K=4000K 50K=5000K	MS=Motion sensor  EM=Emergency Backup	F=Frosty C= Clear
			36CPT=Power & CCT Selected: 32W-44W-50W and 3000K-4000K-5000K			

## PACKAGE

NO.	Model#	Carton Size (LXWXH)	G. W. / CTN	QTY/CTN (PCS)	20' GP Loading	40' GP Loading
1	LT-TPA436CP(T)	128X32X34cm	15.1 Kg	6	1026 PCS	2310 PCS

## ACCESSORIES OPTIONS



Emergency Battery



Motion Sensor



Suspended Kit

<https://www.lightideled.com> | [sales@lightideled.com](mailto:sales@lightideled.com)

Lightide Manufactory Co., Ltd. | Lightide HK Industrial Co., Limited

**LIGHTIDE**  
— Lighting Your Value —