

Linear LED Vapor Tight

Wattage & CCT Selectable | 150 LPW | Emergency Available

TPA SERIES

www.lightideled.com



LINEAR LED SOLUTION

Upgrade your lighting system with our Linear LED Vapor Tight Light, designed to provide powerful lighting in harsh environments. This LED fixture is perfect for car washes, parking garages, and other wet environments where traditional lighting systems struggle to withstand the weather.



01

Full shatterproof plastic housing that protects the light source from dust and moisture, ensuring that it will last for years without any maintenance.


02

With high-performance chips, this LED fixture can output up to 150 lumens per watt, providing bright and efficient lighting that will save you up to 80% on electricity costs.

03

Can be built with wattage & CCT selectable switch to reduce stocking inventory.

LIGHT YOU CAN TRUST

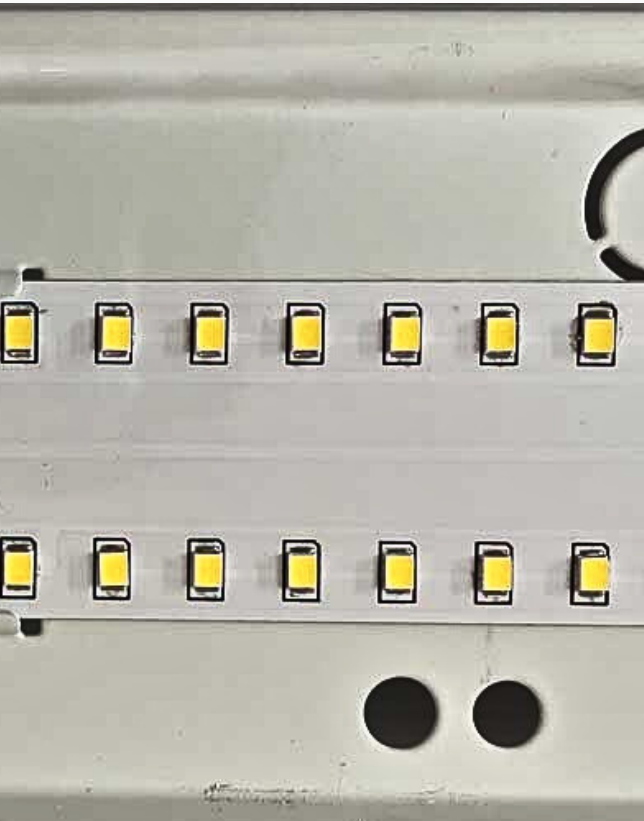

■ High Efficacy 150 LPW

Providing bright and efficient lighting that will save you up to 80% on electricity costs.

■ CCT & Watt Selectable

Allowed 3 different wattage and color temperature settings with two simple slide switches, such as 32W-40W-50W and 3000K-4000K-5000K.



■ Emergency Backup

These linear LED lighting fixtures can be built with a UL924 & CE-certified battery for backup lighting. This way they can get people out of the building in case of power outages, blackouts, fires, etc.



■ Shatter-Proof & Vapor Tight

Full shatterproof plastic housing that protects the light source from dust and moisture, ensuring that it will last for years without any maintenance

**RELIABLE LIGHTING
YOU NEED**

Order Info.

Com.	Series	Size	Power	Voltage	CCT	Option	Duration (EM)	Diffuser
LT	TPA	2	20	Blank=100-277vac	30K=3000K	DM= 1-10VDC Dimming	Std.=90 Min.	Std.=Frosty
		4	36	HV =200-480vac	40K=4000K	PC= Photocell	2H= 120 Min.	C=Clear
			40CP	EV=200-240vac	50K=5000K	MS= Motion Sensor	3H= 180 Min.	
			44CP		57K= 5700K			
		8	08		T= 30K-40K-50K Select.	EM=Emergency Kit		
			10					
			12		65K=6500K	EMH=Emergency (Field-Assem.)		

No.	Description	Data
1.	Case	Shatter proof PC/ABS
2.	Input Voltage	100-277vac
3.	Lumen Efficacy	130~150 LPW
4.	CRI	80
5.	Std.1-10vdc dimming	Yes
6.	Emergency Backup	Available
7.	Certificate	DLC, ETL, CETL, CE, RoHS
8.	Waranty	5 Years

Thank You!

Hopefully, we can work together and the projects will be successful.



**Let's Get
In Touch**

Contact Us
sales@lightideled.com

Visit Our Website
www.lightideled.com