



WALL PACK LED LIGHT

Catalog
2024 Ver 2

www.lightideled.com | sales@lightideled.com



FEATURES





SEMI CUT-OFF

LT-WP01 Series

- Wide Input Voltage - 100-277 or 120-347vac
- Excellent Efficacy - 140 lumens per watt
- Wattage & CCT Selectable
- 5-Year Unlimited Warranty
- Listings -DLC certified, ETL/cETL, CE/RoHS
- Emergency Battery Backup is available.
- Work Temperature: -40°F ~+140°F



Emergency Backup



Dark Sky Compliant Shield



Remote Control Motion Sensor



ORDERING GUIDE

Com.	Series	Rated	Voltage	CCT	Option	Duration	Cover
LT	WP01	40W	Blank=100-277vac	30K =3000K	DM=1-10VDC	STD.=90MIN.	Blank=Glass
		60W	HV =200-480vac	40K=4000K	PC=Photocell	2H=120MIN.	P=Plastic
		90W		50K=5000K	MS=Motion	3H=180MIN.	
		120W		57K= 5700K	EM=Emergency		
		60WCP =36W-48W-60W Selectable		T= 30K-40K-50K Selectable			
		120WCP =72W-100W-120W Selectable					





FULL CUT-OFF

LT-WPCA Series (Trapezoid)

Outdoor Full Cutoff LED wall packs feature trapezoid style and dusk to dawn work mode. 135 LPW of LED wall pack for 400W MH Equiv. In addition, exterior led wall light fixtures can work great for pathway and building perimeter lighting. Moreover, these wall-mounted LED lights are also fit for illumination of entry and exit ways enabling security lighting.

- Wide Input Voltage - 100-277 or 120-347vac
- Excellent Efficacy: 120-136 lumens per watt
- Emergency Backup is available.

ORDERING GUIDE

Com.	Series	Rated	Voltage	CCT	Option	Duration
LT	WPCA	35W	Blank=100-277vac	30K =3000K	DM=1-10VDC	STD.=90MIN.
		60W	HV =200-480vac	40K=4000K	PC=Photocell	2H=120MIN.
		80W		50K=5000K	MS=Motion	3H=180MIN.
		100W		57K= 5700K	EM=Emergency	



Emergency Backup



Remote Control Motion Sensor





ROTATABLE

LT-WPSLA Series (Gen 2)

Outdoor LED Wall Pack Lights combine rotatable styling and unique optical design (90°X65°) for floodlighting and security lighting. In addition, the design separating the heat dissipation system from drivers can keep more lifespan and guarantee long-time safety operations.

- Excellent Performance - 124 LPW.
100-120W LED wall pack 400W equivalent.
- Rotatable Style - 0-90 degrees of direction adjusted.
- Photocell available

ORDERING GUIDE


Com.	Series	Rated	Voltage	CCT	Option	Finish
LT	WPSLA	35W	Blank=100-277vac	30K =3000K	DM=1-10VDC	Blank=Brown
		60W	HV =200-480vac	40K=4000K	PC=Photocell	WH= White
		80W		50K=5000K	MS=Motion	
		100W		57K= 5700K		



Dusk-Dawn



Adjustable

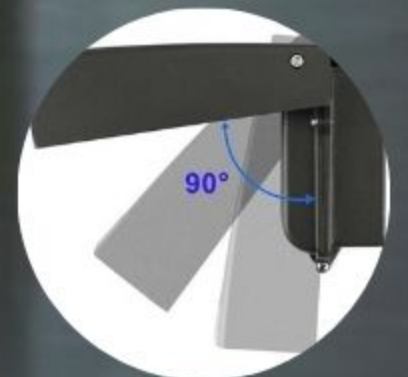



MINI STYLE

LT-WP02 (S) Series

LED mini wall mounted lights with photocell work great for pathway and building perimeter lighting. And it's a perfect choice to be used in parking garages, schools, outdoor walkways, gardens, fences, stairs, patio, driveway, outdoor security lighting, and anywhere that needs great lights.

- Dusk to Dawn
- Excellent Performance - 110 lumens per watt.
- Fully Weatherproof - IP65 rated.
- 12W, 18W, 20W, 25W, 30W

ORDERING GUIDE

Com.	Series	Rated	Profile	CCT	Option	Finish
LT	WP02	12W	S	30K =3000K	PC=Photocell	Blank=Brown
		18W		40K=4000K		WH= White
		20W		50K=5000K		
		25W		57K= 5700K		
		30W				



LT-WP02 series



LT-WP02-S
(Rectangle Profile)





BULKHEAD

LT-WR Series

Outdoor LED wall lighting fixture is a bulkhead type of lighting fixture that is designed to be mounted on walls or ceilings. It is commonly used in outdoor spaces such as gardens, patios, porches, and driveways. The bulkhead design provides a sturdy and durable housing for the LED lights, making it ideal for outdoor use.

- Excellent Performance - 100+ lumens per watt.
- Flush mount for ease of installation and maintenance
- PIR/Microwave Motion Sensor available
- IP65 weatherproof rated.
- Emergency Backup is available.

ORDERING GUIDE

Com.	Series	Size	CCT	Option	Finish
LT	WRA	145	30K =3000K	PS=PIR Motion Sensor	Blank=Black
	WRB	220	40K=4000K	EM= Emergency Battery Back	WH= White
	WRC	275	50K=5000K	MS=Microwave Motion Sensor	
	WRD	360	57K= 5700K		
	WRE				



WRB SERIES
(Half Cutoff)



WRC SERIES
(Y Grid)



WRA SERIES
(No Grid)



WRE SERIE
(+ Grid)



WRD SERIE
(# Grid)





WEATHERPROOF

LT-WL Series

Introducing our cutting-edge LED Outdoor Wall Mount Flood Light - a beacon of brilliance engineered for exceptional performance. This flush-mounted marvel delivers an impressive 100 lumens per watt, ensuring optimal illumination while minimizing energy consumption.

- Excellent Performance - 100+ lumens per watt.
- Flush mount for ease of installation and maintenance
- PIR/Microwave Motion Sensor available
- IP65 weatherproof rated.
- Emergency Backup is available.

ORDERING GUIDE

Com.	Series	Wattage	CCT	Option	Base Finish
LT	WLA	12W	30K =3000K	MS=Microwave Motion Sensor	Blank=Black
	WLB	15W	40K=4000K	EM= Emergency Battery Back	WH= White
	WLD	18W	50K=5000K	PS= PIR Motion Sensor	
	WLE	20W	57K= 5700K		
		10W			



WLA SERIES
(No Grid)

WLB SERIES
(Half Cutoff)

WLD SERIES
(# Grid)

WLE SERIES
(+ Grid)





BARN LIGHTS

LT-AF02 Series

Unleash superior illumination for your barns, warehouses, or expansive outdoor areas with our top-of-the-line LED Barn Lights. Outdoor LED Barn Lights boast a robust design, crafted from high-duty die-casting aluminum alloy, ensuring they can withstand the harshest weather conditions. A shatterproof polycarbonate cover bolsters their resilience, achieving an IK08 impact resistance rating.

- **Excellent Performance - 120 lumens per watt.**
- **Dusk to Dawn**
- **5-Year Warranty**
- **Listing - ETL/cETL, CE & RoHS.**

ORDERING GUIDE

Com.	Series	Rated	Voltage	CCT	Option
LT	AF02	35W	Blank=120-277vac	30K =3000K	DM=1-10VDC
		70W	HV=200-480vac	40K=4000K	PC1=Big Photocell
				50K=5000K	PC2=Small Photocell
				57K= 5700K	



Dusk-Dawn





PARKING LOT LIGHTS


LT-SBAL(C) Series (Slim Profile)

LED parking lot lights are the perfect solution for illuminating large outdoor areas while reducing energy costs. With die-casting aluminum case and high-efficacy 140 LPW, our lights provide a bright and even light distribution, ensuring maximum visibility and safety for drivers and pedestrians alike.

- 140 lumens per watt. 400W MH equivalent by 100W led Wall Packs.
- Slim profile
- Type II, III, V for option
- Dusk-Dawn photocell sensor available
- Die-casting housing + Shatter-proof PC/Glass lens

ORDERING GUIDE

Com.	Series	Rated	Voltage	CCT	Option	Mount Base	Beam Angle
LT	SBALC	100=100W	Blank=100-277vac	30K =3000K	DM=1-10VDC	SF=Slip fitter	Blank=T3
		150=150W	HV=200-480vac	40K=4000K	PC=Photocell	EA=Adjustable Arm	T2=Type II
		200=200W		50K=5000K	MS=Motion		T5=Type V
		250=250W		57K= 5700K			
		300=300W					



CHOOSING GUIDE

2

Choose Wattage

40W 100W EQUIV. Up to 4,800 lm	60W 150W EQUIV. Up to 7,200 lm	90W 250W EQUIV. Up to 10,800 lm	120W 250W EQUIV. Up to 14,400 lm
---	---	--	---

4

Choose Accessories

Light shield
wire guard

1

Choose Style

Semi Cutoff
Full Cutoff
Mini Style

3

Choose Options

VOLTAGE	CCT	CONTROL	COVER
100-277vac	3000K	1-10vdc dim	Glass
347vac	4000K	Motion	plastic
480 vac	5000K	Photocell	
	5700K	Emergency	



CONTACT

*We look forward to working
with you*



SHENZHEN, CHINA



+86-755-8383-7000



www.lightideled.com



sales@lightideled.com

