

# UFO LED High Bay Battery Backup

UL 924 | Factory Assem. | IP65 Rated

Model #	LT-UBA-EM Series
Type	High Bay
Version	DI: 2021-08

## DESCRIPTION

UFO LED High bay lights battery backup not only can provide excellent lighting efficacy for regular illumination, but also offer reliable backup lighting in an emergency. Therefore, they can guide people out of the building in time under power outages, blackouts, fires, and lightning strikes, etc. These emergency lights are made to last for a long time with their quality construction and durable materials such as tempered glass or polycarbonate lenses and aluminum housings. Our emergency lights are available in your choice of battery to accommodate your space with ease and affordability.

### CONSTRUCTION & MATERIALS

- ◆ Die-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- ◆ Impact-proof glass or PC cover
- ◆ IP 65 rating waterproof protection
- ◆ Black polyester powder-coated finish.
- ◆ Test switch for emergency mode
- ◆ Indicator lamp built with test switch

### EMERGENCY BATTERY

- ◆ Lithium (Li-Fe/Ni-MH for options)
- ◆ UL 924 & CEC (CA Title 20) compliant
- ◆ Charge time: 24 hrs
- ◆ Emergency time: 90~180 minutes
- ◆ Charge cycle: >500 times
- ◆ Work Temp. -22°F~+140°F (-30°C~+60°C). Especial temperature will be consulted. \*

### MOUNTING AND WIRING

- ◆ Chain mount/Conduit mount

### ENVIRONMENTAL SYSTEM

- ◆ Outdoor wet/damp location

### ELECTRICAL SYSTEM

- ◆ Input voltage 100-277VAC
- ◆ ETL/cETL, CE/RoHS.
- ◆ DoE high efficiency

### OPTICAL SYSTEM

- ◆ 140-160 lm/w output efficacy
- ◆ Color temperature: 3000K, 4000K, 5000K and 5700K. Other color temperature available for special order, consult factory for lead time.
- ◆ 60°/90°/120° beam angle

### LIGHTING CONTROL

- ◆ 0-10vdc dimming available
- ◆ Bi-level Microwave motion sensor available

### WARRANTY


- ◆ 5 Years

### STANDARD


- ◆ EN61347-1, EN61347-2-13, EN60598-2-1, EN60598-1
- ◆ UL 924, UL 1598, CAN/CSA -C.22.2 NO. 250.0,



## DIMENSION



## ACCESSORIES

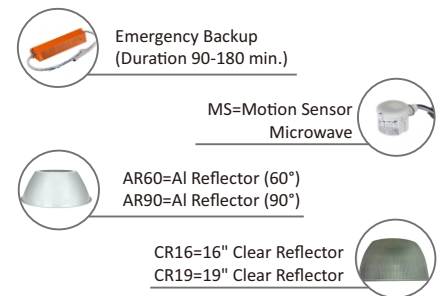

## DATASHEET

Model#	LT-UBA280-80W-EM LT-UBA280-100W-EM	LT-UBA320-150W-EM LT-UBA320-160W-EM	LT-UBA400-200W-EM LT-UBA400-240W-EM	LT-UBA400-300W-EM
Rated Power	80W/100W	150W/160W	200W/240W	300W
Output Efficacy	140 ~160 LPW	140 ~160 LPW	140 ~160 LPW	130 ~150 LPW
CRI	>80	>80	>80	>80
Beam Angle	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°
Dimension (DXH)	Ø340X340 mm (*)	Ø340X340 mm	Ø400X360 mm	Ø400X360 mm
L70 Life	>50,000hrs	>50,000hrs	>50,000hrs	>50,000hrs
Battery	Lithium/Ni-MH	Lithium/Ni-MH	Lithium/Ni-MH	Lithium/Ni-MH
Duration (minutes)	90 (120/180 Options)	90 (120/180 Options)	90 (120/180 Options)	90 (120/180 Options)
Emergency Power	20W (*)	20W	20W~30W	30W
Emergency Output	3500 lumens (*)	3500 lumens	3500~5250 lumens	5250 lumens
Certificate	ETL/cETL, CE/RoHS	ETL/cETL, CE/RoHS	ETL/cETL, CE/RoHS	ETL/cETL, CE/RoHS

\* Updated on 202009.

## ORDER INFORMATION

Sample Number: LT-UBA320-150W-27K-EM-Std.

Com.	Family Name	Size Code	Wattage	CCT	Voltage	Accessories	Duration
LT	UBA	280 320 400	80W 100W 150W 160W 200W 240W 300W	27K=2700K 30K=3000K 40K=4000K 50K=5000K 57K=5700K 65K=6500K	Blank=100-277VAC	DM=0-10VDC Dim DA=DALI Dim PS= Photocell MS= Motion sensor EM=Emergency Kit AR60/AR90 CR16/CR19	Std.= 90 minutes 2H= 120 minutes 3H= 180 minutes